

Infinitt G3 Integration Quick Reference Card

PowerScribe® 360 | Reporting Desktop Client Integration

NOTE: Nuance employees are not authorized to adjust or configure the settings on a customer's PACS. The customer, or the customer's PACS representative, must make any necessary changes to the PACS configuration or settings.

Feature Overview

In **Master** mode:

- Mark exam as dictated/read
- Launch PACS images using PowerScribe 360 | Reporting work list
- Launch PowerScribe 360 | Reporting report using PACS work list
- Can be installed on same PC as PACS/RIS

In **Slave** mode:

- Application launch
- Single login/logout
- Mark exam as dictated/read

Multiple Sites and Multiple Integrations

- If the system has multiple *sites* and the integration type is master, duplicate the master mode integration under each site. If the integration type is slave do not set up duplicate integrations under each site. Set up all slave integrations under the primary site (first site created). When a user logs in, no matter what site they are working under, the system will read the slave integrations created under the primary site and confirm the workstation is set up with the correct directory structures.
- If there are multiple *integrations* on a system, and more than one uses file drop integration such as XML, you will need to ensure that each file drop integration drops files into, or reads files from, separate sub folders under **c:\Nuance** on the client workstation.

For example, an organization using both GE and Hologic might consider using the following paths:

- C:\Nuance\GE\
- C:\Nuance\Hologic\

Site PACS Settings: Master

1. Go to **Setup > Sites > PACS** section.
2. Click the **Edit**  icon for the PACS you want to configure as Master (or click the **Add**  icon to create a new PACS entry).
3. From the **Type** drop-down list, select **Infinitt**.
4. In the **Name** field, type **Infinitt master**. (The **Description** field is optional.)
5. In the **Mode** field, select **Master**.
6. In the **Master** text field, enter
`http://g3iis/pkg_pacs/external_interface.aspx?TYPE=V&LID={username}&LPW={password}&AN={accession}`
7. Click the **Save**  icon. Your entry should look like the example illustration below.

PACS:	Type	Name	Description	Mode
	 Infinitt	Infinitt master	Infinitt master	Master: http://g3iis/pkg_pacs/external_interface.aspx?TYPE=V&LID={username}&LPW={password}&AN={accession}
	 PowerScribe XML	PowerScribe XML	Infinitt slave	Slave: C:\nuance\xml_in\study.xml;C:\nuance\xml_out\response.xml;password=1234
				

Page 1

Infinit G3 Integration Quick Reference Card

PowerScribe® 360 | Reporting Desktop Client Integration

Site PACS Settings: Slave

1. Go to **Setup > Sites > PACS** section.
2. Click the **Edit**  icon for the PACS you want to configure as Slave (or click the **Add**  icon to create a new PACS entry).
3. From the **Type** drop-down list, select **PowerScribe XML**.
4. In the **Name** field, type **PowerScribe XML**. (The **Description** field is optional.)
5. In the **Mode** section, select **Slave**.
6. In the **Slave** text field, enter
c:\nuance\xml_in\study.xml;c:\nuance\xml_out\response.xml;password=1234;multisite=all
Optional edit for multisite:
 - **thissite** - Only the configured site will be searched.
 - **selected** - Search will be based on the value selected in the site drop-down box in *PowerScribe 360 | Reporting*.
7. Click the **Save**  icon. Your entry should look like the example illustration below.

PACS:	Type	Name	Description	Mode
 	Infinit	Infinit master	Infinit master	Master: http://g3iis/pkg_pacs/external_interface.aspx?TYPE=V&LID={username}&LPW={password}&AN={accession}
 	PowerScribe XML	PowerScribe XML	Infinit slave	Slave: C:\nuance\xml_in\study.xml;C:\nuance\xml_out\response.xml;password=1234

Page 1

Example: c:\Nuance\xml_in\study.xml; c:\Nuance\xml_out\status.xml;MultiAccSeparator=\;multisite=thissite


Infinitt G3 Integration Quick Reference Card

PowerScribe® 360 | Reporting Desktop Client Integration

PACS Configuration Notes

NOTE: The PACs administrator or PACs vendor Representative must perform the following steps.

1. Four integration files (**Enclnf.dll**, **MFSR.ini**, **MFSR_XML.exe**, and **PS360.xml**) must be installed in the **Common** folder.
2. If you have a customized installation path, modify the **External_SR** and **SampleXML** path in the **MFSR.ini** file.

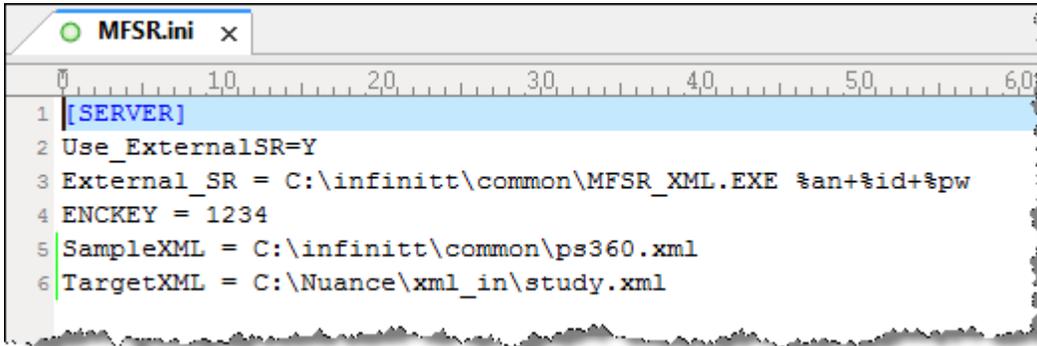

```
MFSR.ini x
1 [SERVER]
2 Use_ExternalSR=Y
3 External_SR = C:\infinitt\common\MFSR_XML.EXE %an+%id+%pw
4 ENCKEY = 1234
5 SampleXML = C:\infinitt\common\ps360.xml
6 TargetXML = C:\Nuance\xml_in\study.xml
```

3. In the Master Mode, **hostname** must be changed to the actual IIS server name or IP address. INFINITT supports http and https for the URL call.
4. In the Master Mode, the **Type** field is optional when calling the G3 PACS viewer. If the **Type** is not specified, the default type is **S**.
 - **Type=S**: If the type = S, an accession number should be one of the parameters calling the PACS. Type S launches the PACS directly to the images in the Image Viewer. The user can get back to the PACS Worklist and search for other studies.
 - **Type=V**: Similar to type S, but type V does not allow the user to get back to the PACS worklist to search for other studies from PACS. Specific studies can only be launched/loaded from the third-party application.
5. The Infinitt integration type is Master Mode ONLY. For the Slave Mode, you must select the type **PowerscribeXML**. (See *Site PACS Settings: Slave* on page 2 of this document.)
6. This integration definition requires a path for the response file, even if the INFINITT code never uses it.